

TRANSMITTAL LETTER TO THE UNITED STATES  
DESIGNATED/ELECTED OFFICE (DO/EO/US)  
CONCERNING A FILING UNDER 35 U.S.C. 371

ATTORNEY'S DOCKET NUMBER

ZAHFRI P393US

U.S. APPLICATION NO. (If known, see 37 CFR 1.5)

10/018412

INTERNATIONAL APPLICATION NO.

PCT/EP00/06744

INTERNATIONAL FILING DATE

July 14, 2000

PRIORITY DATE CLAIMED

July 20, 1999

TITLE OF INVENTION

## POWER DISTRIBUTION TRANSMISSION

APPLICANT(S) FOR DO/EO/US

Martin HILDEBRAND and Rudolf ZENTSCH

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a FIRST submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a SECOND or SUBSEQUENT submission of items concerning a filing under 35 U.S.C. 371.
3. ☒ This express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(1).
4. ☒ A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.
5. ☒ A copy of the International Application as filed (35 U.S.C. 371(c)(2))
  - a. ☐ is transmitted herewith (required only if not transmitted by the International Bureau).
  - b. ☒ has been transmitted by the International Bureau. (PCT/IB/308 mailed 25 January 2001).
  - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☒ A translation of the International Application into English (35 U.S.C. 371(c)(2)) is attached.
7. ☒ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3))
  - a. ☐ are transmitted herewith (required only if not transmitted by the International Bureau).
  - b. ☐ have been transmitted by the International Bureau.
  - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
  - d. ☒ have not been made and will not be made.
8. ☐ A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
9. ☒ An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).
10. ☐ A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).

Items 11. to 16. below concern other document(s) or information included:

11. ☒ An Information Disclosure Statement under 37 CFR 1.97 and 1.98 with PTO FORM 1449.
12. ☒ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
13. ☒ A FIRST preliminary amendment.  
☐ A SECOND or SUBSEQUENT preliminary amendment.
14. ☐ A substitute specification w/Marked-Up Version of Amended Specification.
15. ☐ A change of power of attorney and/or address letter.
16. ☒ Other items or information:
  - ☒ Preliminary Examination Report
  - ☒ Annexes to Pre. Ex. Rep.
  - ☐ International Search Report
  - ☒ German Novelty Search Report
  - ☒ 14 copies of citations
  - ☒ Form PCT/IB/308
  - ☒ International Publ. No. **WO 01/06150 A1** (Face page only)
  - ☒ Copy of Request
  - ☒ Submission of Formal Drawings
  - ☒ 4 sheets of formal drawings
  - ☒ Abstract
  - ☐ Applicant Claims Small Entity Status
  - ☐ Copy of Notification of File Missing Parts
  - ☐ German Language Specification

## CERTIFICATION UNDER 37 CFR 1.10

I hereby certify that this Transmittal Letter and the papers indicated as being transmitted therewith is being deposited with the United States Postal Service on this date **December 13, 2001** in an envelope as "Express Mail Post Office to Addressee" Mailing Label Number **EL 918841513 US** addressed to the: Box PCT, Assistant Commissioner of Patents, Washington, D.C. 20231.

Anthony G. M. Davis

(typed or printed name of person mailing paper)

(signature of person mailing paper)

PATENT &amp; TRADEMARK OFFICE



020210

## 17. ■ The following fees are submitted:

**Basic National Fee (37 CFR 1.492(a)(5):**

Search Report has been prepared by the EPO or JPO ..... \$890.00

International preliminary examination fee paid to USPTO (37 CFR 1.492)(a)(1) .. \$710.00

No international preliminary examination fee paid to USPTO (37 CFR 1.492)(a)(2)  
but international search fee paid to USPTO (37 CFR 1.445(a)(2)). ..... \$740.00

Neither international preliminary examination fee (37 CFR 1.492)(a)(3)  
nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO ..... \$1040.00

International preliminary examination fee paid to USPTO (37 CFR 1.492)(a)(4)  
and all claims satisfied provisions of PCT Article 33(1)-(4) ..... \$100.00

ENTER APPROPRIATE BASIC FEE AMOUNT =

CALCULATIONS

PTO USE ONLY

JC13 Rec'd PCT/PTO 13 DEC 2001

890

Surcharge of \$130.00 for furnishing the oath or declaration later than ☐ 20 ☐ 30 months  
from the earliest claimed priority date (37 CFR 1.492(e)).

0

Claims	Number Filed	Number Extra	Rate
Total Claims	6 - 20 =	0	x \$18.00
Independent Claims	1 - 3 =	0	x \$84.00
Multiple dependent claim(s) (if applicable)			+ \$280.00

0

TOTAL OF ABOVE CALCULATIONS =

0

Reduction by ½ for filing by small entity, if applicable. **Applicant Claims Small Entity Status.** (Note 37 CFR 1.9, 1.27, 1.28).

0

SUBTOTAL =

890

Processing fee of \$130.00 for furnishing the English translation later the ☐ 20 ☐ 30 months  
from the earliest claimed priority date (37 CFR 1.492(f)).

0

TOTAL NATIONAL FEE =

0

Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be  
accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property

40

TOTAL FEES ENCLOSED =

930

Amount to be:  
refunded

\$

charged

\$

a. ■ A check in the amount of \$ 930.00 to cover the above fees is enclosed.

b. ☐ Please charge my Deposit Account No. 04-0213 in the amount of \$\_\_\_\_\_ to cover the above fees.  
A duplicate copy of this sheet is enclosed.


c. ■ The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to  
Deposit Account No. 04-0213. A duplicate copy of this sheet is enclosed.

**NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.**

SEND ALL CORRESPONDENCE TO:

*Anthony G.M. Davis*  
Anthony G.M. Davis -- Registration No. 27,868  
Davis & Bujold, P.L.L.C.  
Fourth Floor  
500 North Commercial Street  
Manchester, NH 03101-1151  
Telephone (603) 624-9220  
Telefax (603) 624-9229

PATENT &amp; TRADEMARK OFFICE



020210

12/13/01

PATENT APPLICATION

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of : Martin HILDEBRAND and Rudolf ZENTSCH  
Serial no. :  
For : POWER DISTRIBUTION TRANSMISSION  
Docket : ZAHFRI P393US

**BOX PCT**

The Commissioner of Patents and Trademarks  
Washington, D.C. 20231

**FIRST PRELIMINARY AMENDMENT**

Dear Sir:

By way of preliminary amendment, please amend the above identified application as set forth below.

**In the Specification:**

Please cancel paragraphs 2, 3, 4, 8, 9, 11, 12 and 17 of the specification, in their entirety, in favor of a clean form of paragraphs 2, 3, 4, 9, 11, 12 and 17 of the specification, without any markings thereon, as follows. Accompanying this response is a copy of the original paragraphs of the specification which show the addition(s) (by underlining, shading and bold) and the deletion(s) (by strikeout) to the canceled specification paragraphs. Please enter the replacement specification paragraphs into the record of this case.

**In the Claims:**

Please cancel claims 1-7, without prejudice or disclaimer of the subject matter therein, in favor of new claims 8-13 as follows.

[002] FIELD OF THE INVENTION

[003] The invention concerns a power distribution transmission.

[004] BACKGROUND OF THE INVENTION

[009] SUMMARY OF THE INVENTION

[011] BRIEF DESCRIPTION OF THE DRAWINGS

[012] The invention will now be described, by way of example, with reference to the accompanying drawings in which:

[017] DETAILED DESCRIPTION OF THE INVENTION

8. (NEW) A power distribution transmission having one mechanical and one hydraulic power branch, a hydraulic pump (1) and a hydraulic motor (3) being interconnected in the hydraulic power branch and retained in a transmission housing (7) via elastic damping elements (5) and only in the area in which they are interconnected are said hydraulic pump (1) and said hydraulic motor (3) connected via damping elements (5) with a transmission housing (7), and said hydraulic pump (1) and said hydraulic motor (3) communicate with said mechanical power branch via shafts (12, 17) which are floatingly supported, wherein said shafts (12, 17) have one of crowned teeth and spiral gearing at connecting points (14, 19).

9. (NEW) The power distribution transmission according to claim 8, wherein toothed wheels (13, 16), which are connected via shafts (12, 17) with a hydraulic pump (1) and a hydraulic motor (3), are supported by bearings (15, 20) in a transmission housing (7).

10. (NEW) The power distribution transmission according to claim 8, wherein said hydraulic motor (3) is connected via an intermediate plate (2) with said hydraulic pump (1) which has receptacles (4) for said damping elements (5).

11. (NEW) The power distribution transmission according to claim 10, wherein said receptacles (4) for said damping elements (5) are radially disposed around an axis of rotation (9) of said hydraulic pump (1).

12. (NEW) The power distribution transmission according to claim 8, wherein said hydraulic motor (3) is connected via an intermediate plate (2) with said hydraulic pump (1) which has centering receptacles (110) for centering said intermediate plate (2) in a transmission housing (7).


13. (NEW) The power distribution transmission according to claim 8, wherein said damping elements are situated in one plane.

## REMARKS

Accompanying this response, please find marked-up paragraphs of the specification which overcome some informalities noted in the specification. The undersigned avers that the enclosed replacement paragraph(s) of the specification do not contain any new matter.

In the event that there are any fee deficiencies or additional fees are payable, please charge the same or credit any overpayment to our Deposit Account (Account No. 04-0213).

Respectfully submitted,



Anthony G.M. Davis, Reg. No. 27,868

**Customer No. 020210**

Davis & Bujold, P.L.L.C.

Fourth Floor

500 North Commercial Street

Manchester NH 03101-1151

Telephone 603-624-9220

Facsimile 603-624-9229

E-mail: [patent@davisandbujold.com](mailto:patent@davisandbujold.com)

[001] POWER DISTRIBUTION TRANSMISSION

[002] FIELD OF THE INVENTION

[003] The invention concerns a power distribution transmission of the kind defined in detail in the preamble of Claim 1.

[004] BACKGROUND OF THE INVENTION

[005] Power distribution transmissions, especially as continuously variable transmissions, are often used to drive motor vehicles, particularly field tractors. Especially adequate here are power distribution transmissions having a mechanical power branch and a hydraulic power branch consisting of a hydraulic pump and a hydraulic motor, preferably with a pump of adjustable displacement. Since during operation of the power distribution transmission, mainly the hydraulic power branch produces strong vibrations which in case of fixed connection of the hydraulic motor and the hydraulic pump with the transmission housing pass on the vibrations to the transmission housing causing loud noise, the hydraulic pump and the hydraulic motor have to be uncoupled from the transmission housing.

[006] DE 44 01 509 A1 discloses a continuously variable transmission with power distribution, especially for motor vehicles, which consists of a hydraulic power branch and a mechanical power branch, there being interconnected in the hydraulic power branch a hydraulic pump and a hydraulic motor and in order to uncouple the hydraulic motor and the hydraulic pump from the housing, they are retained in the transmission housing by damping elements. Damping elements are mounted respectively on each side of the hydraulic motor-pump unit through which the forces in the transmission housing can be transmitted. The suspension is configured so as to create a three-point support which is mounted respectively on the input and output side of the continuously variable converter, consisting of the hydraulic pump and the hydraulic motor, as central bearing for fixing the position of the central axle of the continuously variable converter in relation to the transmission housing and a third bearing as supporting bearing for torque support and optionally axial support of the continuously variable converter and that the central bearing is designed so as to make possible a rotation of the continuously variable converter around its central axle against the torque-supporting bearing.

In order to make possible mounting in the transmission housing, the hydraulic motor and the hydraulic transmission with the damping devices, the transmission has to have a divided housing in order to make possible the installation of the hydraulic motor and the hydraulic pump in the transmission housing. If manufacturing tolerances appear, it is possible with this arrangement that the hydraulic motor and the hydraulic pump is installed transversely in the transmission housing whereby, during operation of the power distribution transmission, the damping elements are already compressed to their initial position with the result that the damping of noise is considerably limited. In the transmission, since the input wheels for driving the hydraulic pump and the output wheels on the hydraulic motor are fixedly connected with the shafts of the hydraulic pump and of the hydraulic motor, vibrations and therewith movements are directly transmitted to the running gears in the mechanical power branch whereby the engagement geometry of the running gears is constantly altered.

[007] The problem on which this invention is based is to provide a power distribution transmission having a hydraulic and a mechanical power branch in which the vibrations of the hydraulic power branch are only dampedly emitted to the parts surrounding the hydraulic power branch and the hydraulic power branch stands out by easy installation in the transmission housing.

[008] The problem is solved with a power distribution transmission according to the preamble of the main claim and also having the characteristic features thereof.

[009] **SUMMARY OF THE INVENTION**

[010] According to the invention, the hydraulic power branch consists of a hydraulic pump and a hydraulic motor which are interconnected and in the area of the connection of the hydraulic motor and the hydraulic pump are connected via damping elements with the transmission housing. The hydraulic motor and the hydraulic pump are preferably interconnected via an intermediate plate, which radially to the axis of rotation of the hydraulic pump, has receptacles for the damping elements by which the intermediate plate can be connected with the transmission housing. But it is also possible to situate the damping elements in



motor cannot be transmitted to the running gears of the toothed wheels. It is hereby ensured that the running gears always have the same engagement geometry during operation. Since crowned teeth or a spiral gearing have a smaller contact surface than a straight toothing, the bone conduction is transmitted to a lesser extent than in a standard toothed shaft connection. The hydraulic power branch is thus, on one hand, supported with dampened vibration in the transmission housing in one plane, via the damping elements in the center of gravity of the hydraulic motor whereby an optimal degree of freedom and an easy installation are obtained and, on the other, connected via shafts having crowned teeth with the mechanical power branch whereby the bone conduction is also reduced.

[011]        **BRIEF DESCRIPTION OF THE DRAWINGS**

[012]        ~~Other features can be understood from the description of the figures which show~~  
**The invention will now be described, by way of example, with reference to the accompanying drawings in which:**

[013]        Fig. 1 a dampened suspension of the hydraulic pump and of the hydraulic motor;

[014]        Fig. 2 a dampened suspension of the hydraulic pump and of the hydraulic motor;

[015]        Fig. 3 a side view of the hydraulic pump and of the hydraulic motor; and

[016]        Fig. 4 the connection of the hydraulic motor and of the hydraulic pump with toothed wheels which are connected with the mechanical power branch.

[017]        **DETAILED DESCRIPTION OF THE INVENTION**

[018]        Fig. 1:

A hydraulic pump 1 is connected via an intermediate plate 2 with a hydraulic motor 3 and forms the hydraulic power branch of a power distribution transmission. The intermediate plate 2 has receptacles 4 in which are placed damping elements 5 connected via connecting elements 6 with the transmission housing 7. The damping elements 5 are configured so that the intermediate plate 2 has no

[001] POWER DISTRIBUTION TRANSMISSION

[002]

[003] The invention concerns a power distribution transmission of the kind defined in detail in the preamble of Claim 1.

[004]

[005] Power distribution transmissions, especially as continuously variable transmissions, are often used to drive motor vehicles, particularly field tractors. Especially adequate here are power distribution transmissions having a mechanical power branch and a hydraulic power branch consisting of a hydraulic pump and a hydraulic motor, preferably with a pump of adjustable displacement. Since during operation of the power distribution transmission, mainly the hydraulic power branch produces strong vibrations which in case of fixed connection of the hydraulic motor and the hydraulic pump with the transmission housing pass on the vibrations to the transmission housing causing loud noise, the hydraulic pump and the hydraulic motor have to be uncoupled from the transmission housing.

[006] DE 44 01 509 A1 discloses a continuously variable transmission with power distribution, especially for motor vehicles, which consists of a hydraulic power branch and a mechanical power branch, there being interconnected in the hydraulic power branch a hydraulic pump and a hydraulic motor and in order to uncouple the hydraulic motor and the hydraulic pump from the housing, they are retained in the transmission housing by damping elements. Damping elements are mounted respectively on each side of the hydraulic motor-pump unit through which the forces in the transmission housing can be transmitted. The suspension is configured so as to create a three-point support which is mounted respectively on the input and output side of the continuously variable converter, consisting of the hydraulic pump and the hydraulic motor, as central bearing for fixing the position of the central axle of the continuously variable converter in relation to the transmission housing and a third bearing as supporting bearing for torque support and optionally axial support of the continuously variable converter and that the central bearing is designed so as to make possible a rotation of the continuously variable converter around its central axle against the torque-supporting bearing.

In order to make possible mounting in the transmission housing, the hydraulic motor and the hydraulic transmission with the damping devices, the transmission has to have a divided housing in order to make possible the installation of the hydraulic motor and the hydraulic pump in the transmission housing. If manufacturing tolerances appear, it is possible with this arrangement that the hydraulic motor and the hydraulic pump is installed transversely in the transmission housing whereby, during operation of the power distribution transmission, the damping elements are already compressed to their initial position with the result that the damping of noise is considerably limited. In the transmission, since the input wheels for driving the hydraulic pump and the output wheels on the hydraulic motor are fixedly connected with the shafts of the hydraulic pump and of the hydraulic motor, vibrations and therewith movements are directly transmitted to the running gears in the mechanical power branch whereby the engagement geometry of the running gears is constantly altered.

[007] The problem on which this invention is based is to provide a power distribution transmission having a hydraulic and a mechanical power branch in which the vibrations of the hydraulic power branch are only dampedly emitted to the parts surrounding the hydraulic power branch and the hydraulic power branch stands out by easy installation in the transmission housing.

[008] The problem is solved with a power distribution transmission according to the preamble of the main claim and also having the characteristic features thereof.

[009]

[010] According to the invention, the hydraulic power branch consists of a hydraulic pump and a hydraulic motor which are interconnected and in the area of the connection of the hydraulic motor and the hydraulic pump are connected via damping elements with the transmission housing. The hydraulic motor and the hydraulic pump are preferably interconnected via an intermediate plate, which radially to the axis of rotation of the hydraulic pump, has receptacles for the damping elements by which the intermediate plate can be connected with the transmission housing. But it is also possible to situate the damping elements in

receptacles of the transmission housing and connect them with the intermediate plate. The intermediate plate can also be designed integrally with the housing of the hydraulic motor or the housing of the hydraulic pump. While the hydraulic pump and the hydraulic motor, dampened on their connecting point with the damping elements located in one plane, are supported in the transmission housing, the hydraulic pump-motor unit is retained in the area of its center of gravity and can move in all three axle planes against the elasticity of the damping elements. A separation of the transmission housing is not required, since the intermediate plate can be installed in the transmission housing from one side of the pump-motor unit via fastening elements, preferable a screw connection. The pump-motor unit thus has to be fastened only in its half of the transmission housing. The transmission housing preferably has receptacles for centering pins with which, during the installation, the hydraulic pump and the hydraulic motor are centered in the transmission housing and then connected with the transmission housing by the damping elements. After the hydraulic pump and the hydraulic motor have been fastened in the transmission housing by the damping elements, the centering pins can be removed again. Hereby is ensured a simple installation where, even in the presence of manufacturing tolerances, the hydraulic pump and the hydraulic motor can be installed in the position in which the hydraulic motor-pump unit achieves the required installation position. Input and output shafts of the hydraulic pump and of the hydraulic motor are connected via shafts with the toothed wheels which are in communication with the mechanical power branch, and are supported floatingly, on one side, in the shafts of the hydraulic pump or of the hydraulic motor and, on the other side, in toothed wheels connected with the mechanical power branch. The shafts each have, on their connections with the toothed wheels and the hydraulic pump or the hydraulic motor, crowned teeth or engaging gears designed as spiral gearing with which can be compensated, in combination with the floating support of the shaft, skewed positions or movements of the hydraulic pump and of the hydraulic motor. The toothed wheels, which accommodate the shaft for connection with the hydraulic motor or the hydraulic pump, are supported in the transmission housing so that movements of the hydraulic pump or of the hydraulic

motor cannot be transmitted to the running gears of the toothed wheels. It is hereby ensured that the running gears always have the same engagement geometry during operation. Since crowned teeth or a spiral gearing have a smaller contact surface than a straight toothing, the bone conduction is transmitted to a lesser extent than in a standard toothed shaft connection. The hydraulic power branch is thus, on one hand, supported with dampened vibration in the transmission housing in one plane, via the damping elements in the center of gravity of the hydraulic motor whereby an optimal degree of freedom and an easy installation are obtained and, on the other, connected via shafts having crowned teeth with the mechanical power branch whereby the bone conduction is also reduced.

[011]

[012] Other features can be understood from the description of the figures which show:

[013] Fig. 1 a dampened suspension of the hydraulic pump and of the hydraulic motor;

[014] Fig. 2 a dampened suspension of the hydraulic pump and of the hydraulic motor;

[015] Fig. 3 a side view of the hydraulic pump and of the hydraulic motor; and

[016] Fig. 4 the connection of the hydraulic motor and of the hydraulic pump with toothed wheels which are connected with the mechanical power branch.

[017]

[018] Fig. 1:

A hydraulic pump 1 is connected via an intermediate plate 2 with a hydraulic motor 3 and forms the hydraulic power branch of a power distribution transmission. The intermediate plate 2 has receptacles 4 in which are placed damping elements 5 connected via connecting elements 6 with the transmission housing 7. The damping elements 5 are configured so that the intermediate plate 2 has no direct contact to the transmission housing 7 and can freely move in all three axes

against the elasticity of the damping elements 5. The connection elements 6, which are shown here as screws, are all situated upon the same side and thus are well accessible for the installation. Besides screw elements, still other connecting elements such as alignment pins or snap rings can also be considered.

[019] Fig. 2:

A hydraulic pump 1 is connected via an intermediate plate 2 with the hydraulic motor 3, the intermediate plate 2 being non-turnably connected via damping elements 5 with the transmission housing 7. The damping elements 5 are located within the transmission housing 7 and accessible for assembly outside the transmission housing.

[020] Fig. 3:

The intermediate plate 2 has fastening points 8 which are situated radially around the axis of rotation 9 of the hydraulic pump 1. On the fastening points 8 are fastened the damping elements 5 not shown in this figure. The intermediate plate 2 has centerings 10 with which the hydraulic pump and the hydraulic motor can be centered in the transmission housing 7 in order to ensure the exact position of the hydraulic pump and of the hydraulic motor. If the intermediate plate 2 is fixedly connected via the damping elements 5 with the transmission housing, the centering elements are removed again in order that the hydraulic pump and the hydraulic motor can again move freely. An easy assembly is thus ensured.

[021] Fig. 4:

A hydraulic pump 1 and a hydraulic motor 3 are interconnected via an intermediate plate 2, the intermediate plate 2 being elastically fastened via damping elements 5 in the transmission housing. The drive shaft 11 of the hydraulic pump 1 is connected via a shaft 12 with a toothed wheel 13 which communicates with the mechanical power branch of the power distribution transmission. The shaft 12 has on its ends crowned teeth or toothings designed as spiral gearing and is floatingly supported via said toothings 14 in the toothed wheel 13 and the drive shaft 11. By the toothing 14 being designed as crowned teeth and the shaft 12 floatingly supported, movements of the hydraulic pump and of the hydraulic motor are possible and are not transmitted to the running gears of

the toothed wheel 13, since in addition the toothed wheel 13 is fixedly supported in the transmission housing 7 via the bearing 15. The toothed wheel 16, which on one side communicates with the mechanical power branch and on the other, via a shaft 17, with the drive shaft 18 of the hydraulic motor 3, has on its connecting points crowned teeth or toothings 19 designed as spiral gearing whereby the hydraulic motor 3 and the hydraulic pump 1 can freely move and the movements are not transmitted to the toothed wheel 16, since in addition the toothed wheel 16 is supported in the transmission housing 7 via a bearing 20. It is thus ensured that the running gear of the toothed wheel 16 be not affected.

13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65  
66  
67  
68  
69  
70  
71  
72  
73  
74  
75  
76  
77  
78  
79  
80  
81  
82  
83  
84  
85  
86  
87  
88  
89  
90  
91  
92  
93  
94  
95  
96  
97  
98  
99  
100  
101  
102  
103  
104  
105  
106  
107  
108  
109  
110  
111  
112  
113  
114  
115  
116  
117  
118  
119  
120  
121  
122  
123  
124  
125  
126  
127  
128  
129  
130  
131  
132  
133  
134  
135  
136  
137  
138  
139  
140  
141  
142  
143  
144  
145  
146  
147  
148  
149  
150  
151  
152  
153  
154  
155  
156  
157  
158  
159  
160  
161  
162  
163  
164  
165  
166  
167  
168  
169  
170  
171  
172  
173  
174  
175  
176  
177  
178  
179  
180  
181  
182  
183  
184  
185  
186  
187  
188  
189  
190  
191  
192  
193  
194  
195  
196  
197  
198  
199  
200  
201  
202  
203  
204  
205  
206  
207  
208  
209  
210  
211  
212  
213  
214  
215  
216  
217  
218  
219  
220  
221  
222  
223  
224  
225  
226  
227  
228  
229  
230  
231  
232  
233  
234  
235  
236  
237  
238  
239  
240  
241  
242  
243  
244  
245  
246  
247  
248  
249  
250  
251  
252  
253  
254  
255  
256  
257  
258  
259  
260  
261  
262  
263  
264  
265  
266  
267  
268  
269  
270  
271  
272  
273  
274  
275  
276  
277  
278  
279  
280  
281  
282  
283  
284  
285  
286  
287  
288  
289  
290  
291  
292  
293  
294  
295  
296  
297  
298  
299  
300  
301  
302  
303  
304  
305  
306  
307  
308  
309  
310  
311  
312  
313  
314  
315  
316  
317  
318  
319  
320  
321  
322  
323  
324  
325  
326  
327  
328  
329  
330  
331  
332  
333  
334  
335  
336  
337  
338  
339  
340  
341  
342  
343  
344  
345  
346  
347  
348  
349  
350  
351  
352  
353  
354  
355  
356  
357  
358  
359  
360  
361  
362  
363  
364  
365  
366  
367  
368  
369  
370  
371  
372  
373  
374  
375  
376  
377  
378  
379  
380  
381  
382  
383  
384  
385  
386  
387  
388  
389  
390  
391  
392  
393  
394  
395  
396  
397  
398  
399  
400  
401  
402  
403  
404  
405  
406  
407  
408  
409  
410  
411  
412  
413  
414  
415  
416  
417  
418  
419  
420  
421  
422  
423  
424  
425  
426  
427  
428  
429  
430  
431  
432  
433  
434  
435  
436  
437  
438  
439  
440  
441  
442  
443  
444  
445  
446  
447  
448  
449  
450  
451  
452  
453  
454  
455  
456  
457  
458  
459  
460  
461  
462  
463  
464  
465  
466  
467  
468  
469  
470  
471  
472  
473  
474  
475  
476  
477  
478  
479  
480  
481  
482  
483  
484  
485  
486  
487  
488  
489  
490  
491  
492  
493  
494  
495  
496  
497  
498  
499  
500  
501  
502  
503  
504  
505  
506  
507  
508  
509  
510  
511  
512  
513  
514  
515  
516  
517  
518  
519  
520  
521  
522  
523  
524  
525  
526  
527  
528  
529  
530  
531  
532  
533  
534  
535  
536  
537  
538  
539  
540  
541  
542  
543  
544  
545  
546  
547  
548  
549  
550  
551  
552  
553  
554  
555  
556  
557  
558  
559  
560  
561  
562  
563  
564  
565  
566  
567  
568  
569  
570  
571  
572  
573  
574  
575  
576  
577  
578  
579  
580  
581  
582  
583  
584  
585  
586  
587  
588  
589  
590  
591  
592  
593  
594  
595  
596  
597  
598  
599  
600  
601  
602  
603  
604  
605  
606  
607  
608  
609  
610  
611  
612  
613  
614  
615  
616  
617  
618  
619  
620  
621  
622  
623  
624  
625  
626  
627  
628  
629  
630  
631  
632  
633  
634  
635  
636  
637  
638  
639  
640  
641  
642  
643  
644  
645  
646  
647  
648  
649  
650  
651  
652  
653  
654  
655  
656  
657  
658  
659  
660  
661  
662  
663  
664  
665  
666  
667  
668  
669  
670  
671  
672  
673  
674  
675  
676  
677  
678  
679  
680  
681  
682  
683  
684  
685  
686  
687  
688  
689  
690  
691  
692  
693  
694  
695  
696  
697  
698  
699  
700  
701  
702  
703  
704  
705  
706  
707  
708  
709  
710  
711  
712  
713  
714  
715  
716  
717  
718  
719  
720  
721  
722  
723  
724  
725  
726  
727  
728  
729  
730  
731  
732  
733  
734  
735  
736  
737  
738  
739  
740  
741  
742  
743  
744  
745  
746  
747  
748  
749  
750  
751  
752  
753  
754  
755  
756  
757  
758  
759  
760  
761  
762  
763  
764  
765  
766  
767  
768  
769  
770  
771  
772  
773  
774  
775  
776  
777  
778  
779  
780  
781  
782  
783  
784  
785  
786  
787  
788  
789  
790  
791  
792  
793  
794  
795  
796  
797  
798  
799  
800  
801  
802  
803  
804  
805  
806  
807  
808  
809  
810  
811  
812  
813  
814  
815  
816  
817  
818  
819  
820  
821  
822  
823  
824  
825  
826  
827  
828  
829  
830  
831  
832  
833  
834  
835  
836  
837  
838  
839  
840  
841  
842  
843  
844  
845  
846  
847  
848  
849  
850  
851  
852  
853  
854  
855  
856  
857  
858  
859  
860  
861  
862  
863  
864  
865  
866  
867  
868  
869  
870  
871  
872  
873  
874  
875  
876  
877  
878  
879  
880  
881  
882  
883  
884  
885  
886  
887  
888  
889  
890  
891  
892  
893  
894  
895  
896  
897  
898  
899  
900  
901  
902  
903  
904  
905  
906  
907  
908  
909  
910  
911  
912  
913  
914  
915  
916  
917  
918  
919  
920  
921  
922  
923  
924  
925  
926  
927  
928  
929  
930  
931  
932  
933  
934  
935  
936  
937  
938  
939  
940  
941  
942  
943  
944  
945  
946  
947  
948  
949  
950  
951  
952  
953  
954  
955  
956  
957  
958  
959  
960  
961  
962  
963  
964  
965  
966  
967  
968  
969  
970  
971  
972  
973  
974  
975  
976  
977  
978  
979  
980  
981  
982  
983  
984  
985  
986  
987  
988  
989  
990  
991  
992  
993  
994  
995  
996  
997  
998  
999  
1000

Reference Numerals

1 hydraulic pump	11 drive shaft
2 intermediate plate	12 shaft
3 hydraulic motor	13 toothed wheel
4 receptacles	14 toothing
5 damping elements	15 bearing
6 connecting elements	16 toothed wheel
7 transmission housing	17 shaft
8 fastening points	18 output shaft
9 axis of rotation	19 toothing
10 centering	20 bearing



### Claims

1. Power distribution transmission having one mechanical and one hydraulic power branch, a hydraulic pump (1) and a hydraulic motor (3) being interconnected in the hydraulic power branch and retained in a transmission housing (7) via elastic damping elements (5), characterized in that only in the area in which they are interconnected are said hydraulic pump (1) and said hydraulic motor (3) connected via damping elements (6) with a transmission housing (7).

2. Power distribution transmission according to Claim 1, characterized in that said hydraulic pump (1) and said hydraulic motor (3) communicate with said mechanical power branch via shafts (12, 17) which are floatingly supported and are designed as crowned teeth or as spiral gearing on the connecting points (14, 19).

3. Power distribution transmission according to Claim 2, characterized in that said toothed wheels (13, 16), which are connected via shafts (12, 17) with a hydraulic pump (1) and a hydraulic motor (3), are supported in a transmission housing (7) via bearings (15, 20).

4. Power distribution transmission according to Claim 1, characterized in that said hydraulic motor (3) is connected via an intermediate plate (2) with said hydraulic pump (1) which has receptacles (4) for said damping elements (5).

5. Power distribution transmission according to Claim 4, characterized in that said receptacles (4) for said damping elements (5) are radially disposed around an axis of rotation (9) of said hydraulic pump (1).

6. Power distribution transmission according to Claim 1, characterized in that said hydraulic motor (3) is connected via an intermediate plate (2) with said hydraulic pump (1) which has centering receptacles (110) for centering said intermediate plate (2) in a transmission housing (7).

7. Power distribution transmission according to Claim 1, characterized in that said damping elements are situated in one plane.

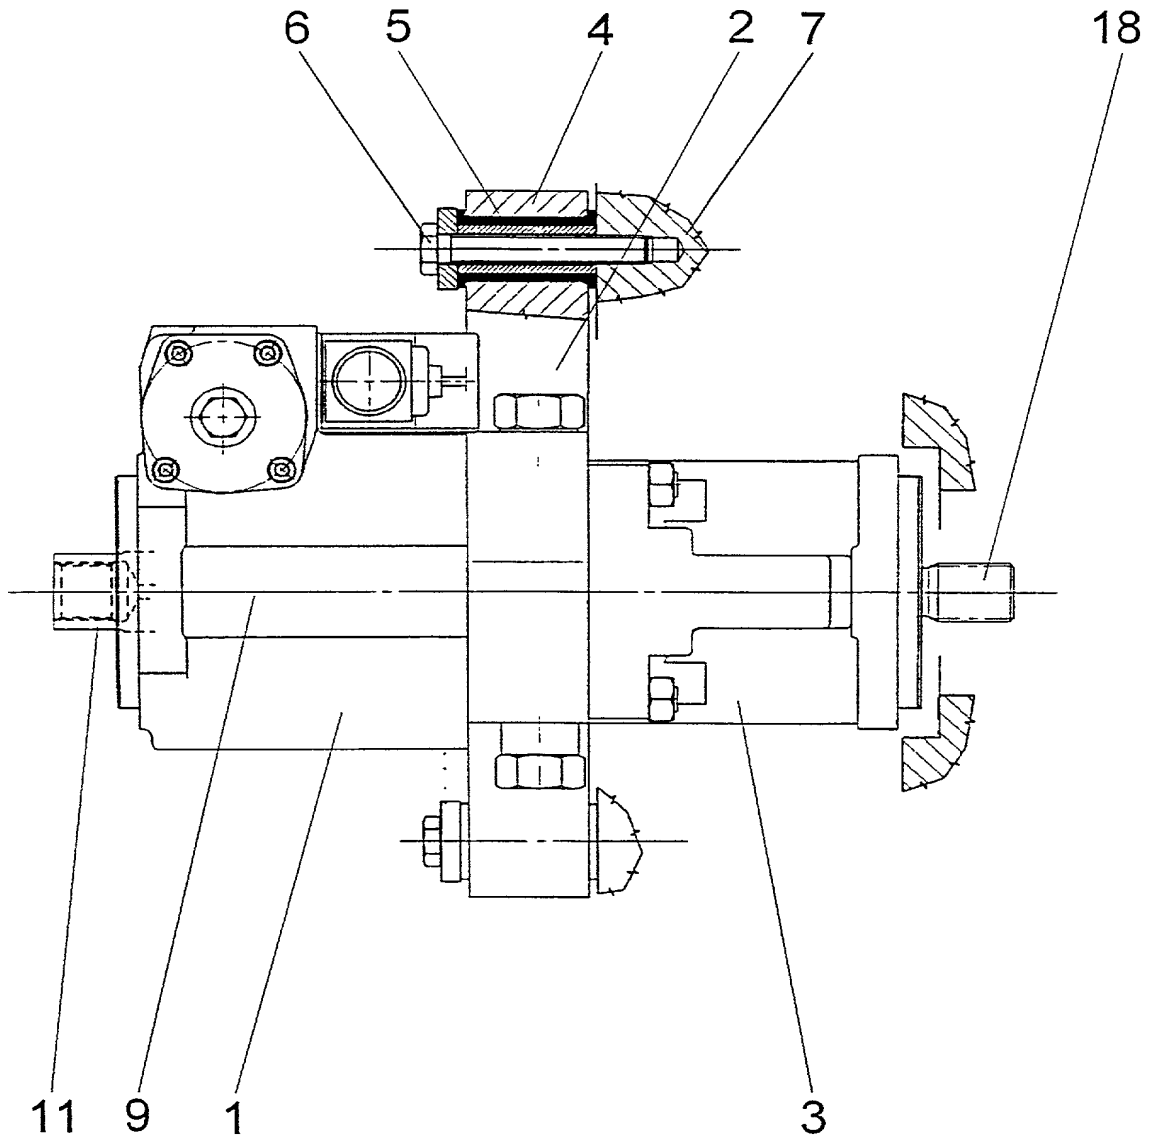


Fig. 1

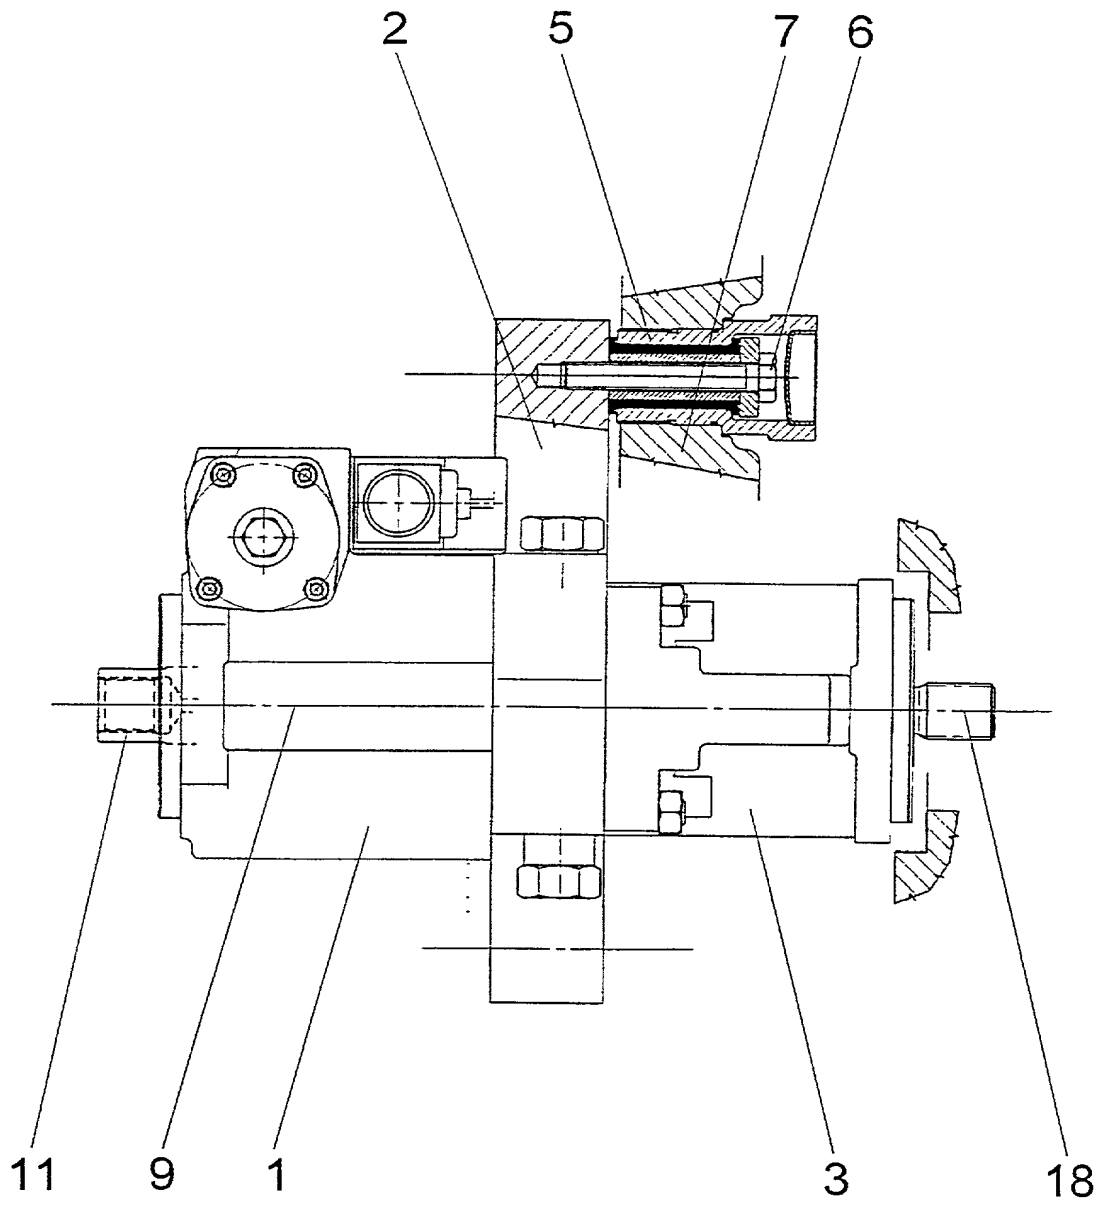


Fig. 2

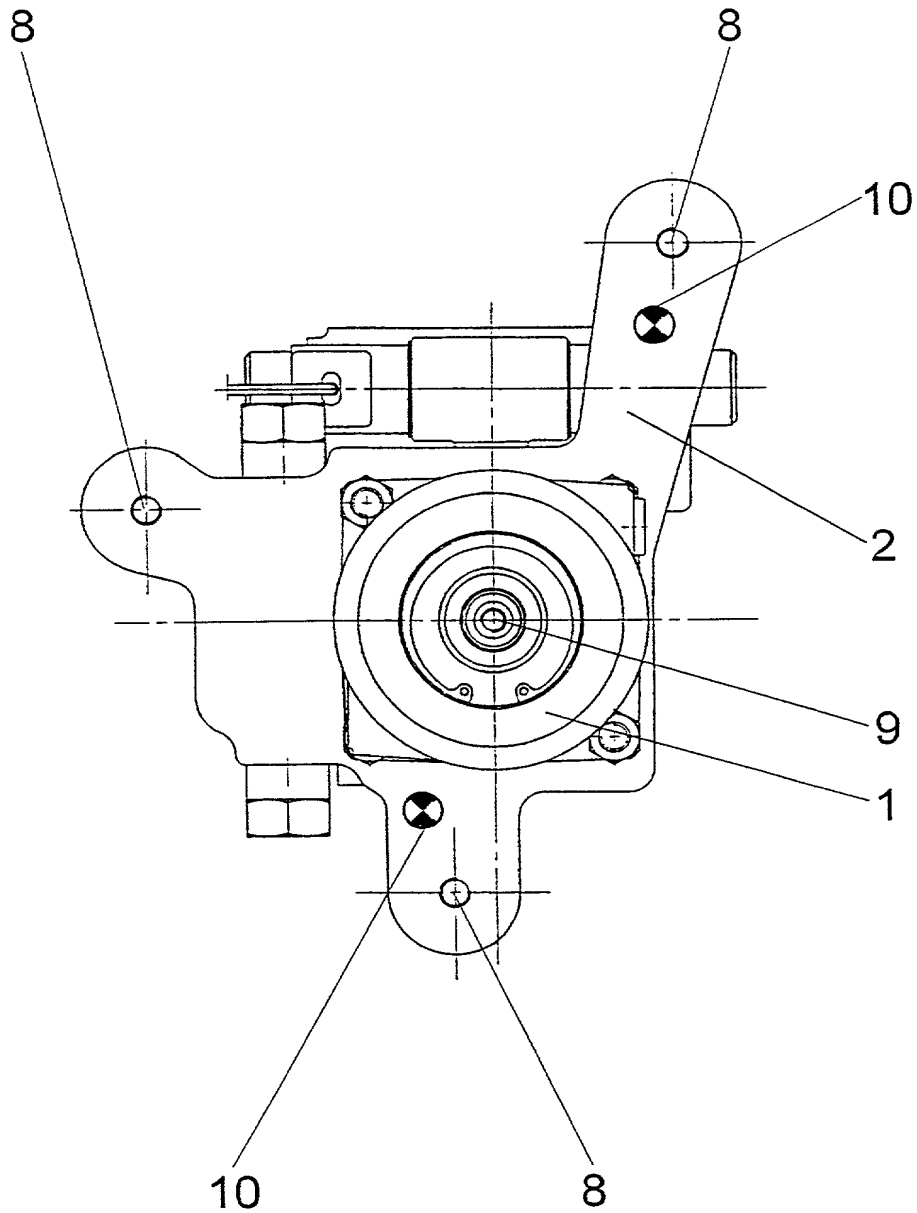


Fig. 3

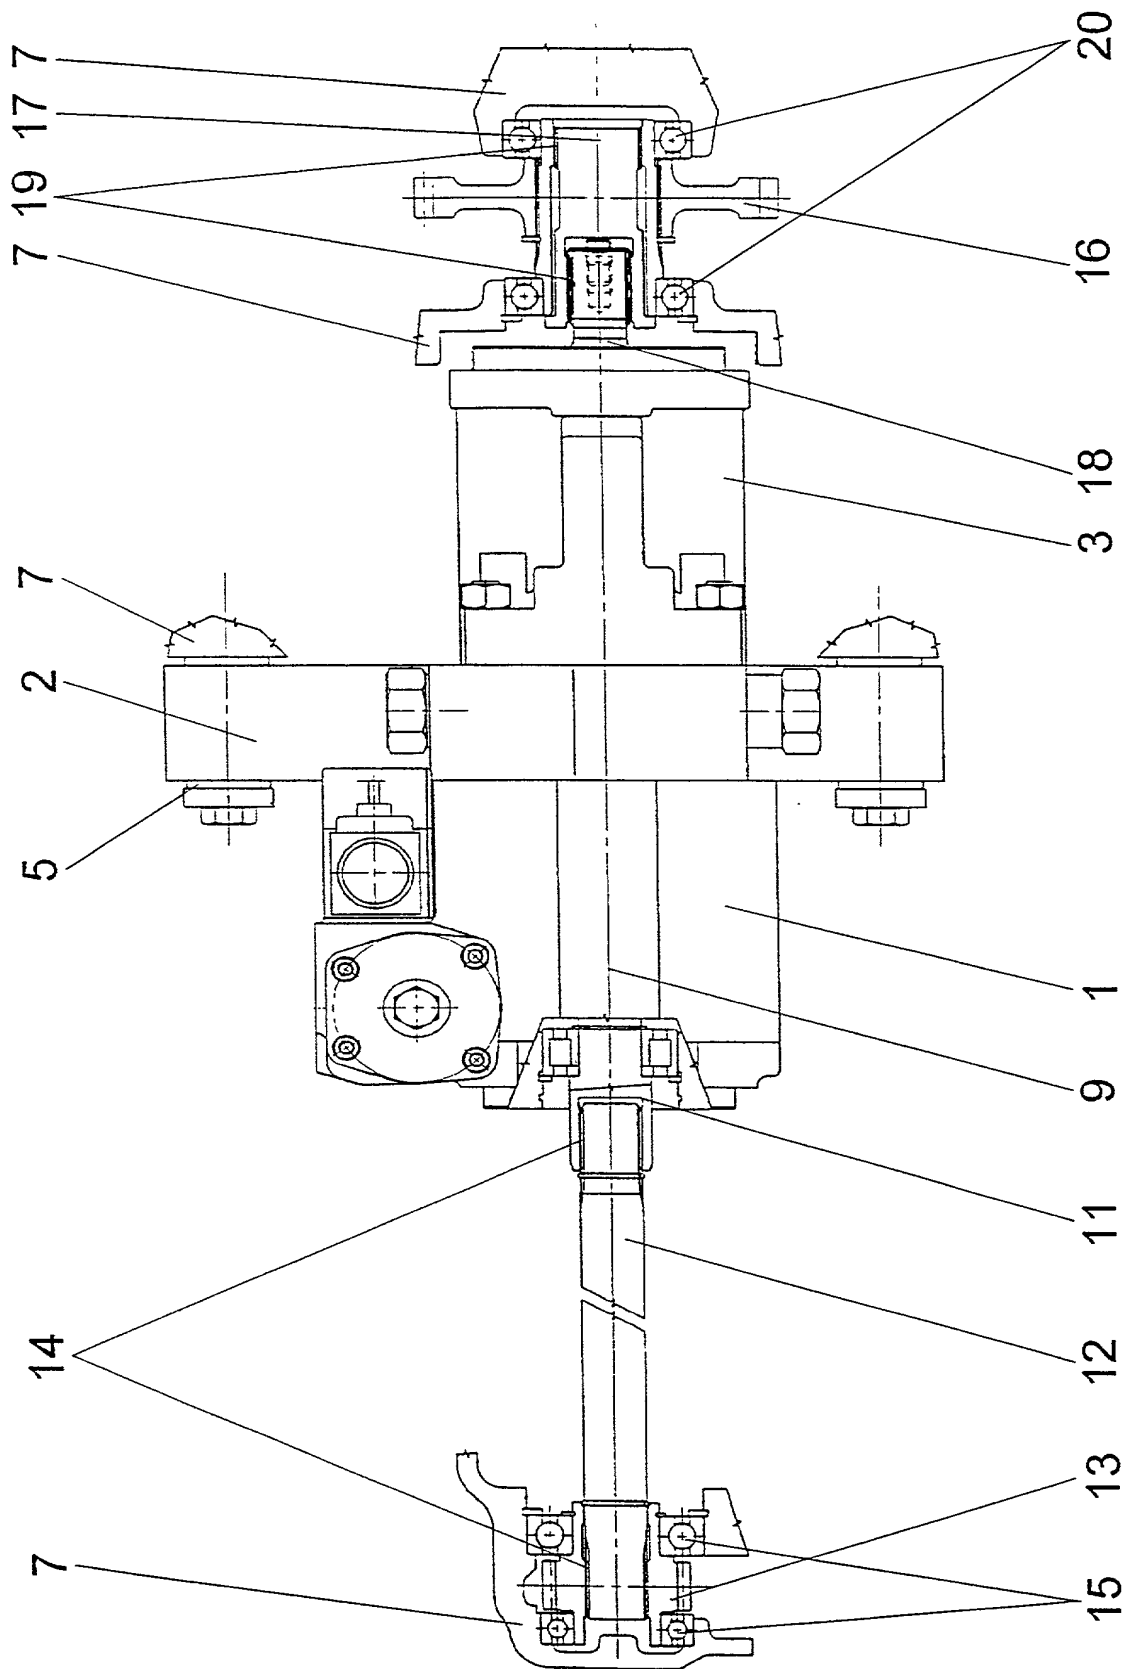


Fig. 4

**COMBINED DECLARATION AND POWER OF ATTORNEY**  
(Original, Design, National Stage of PCT, Supplemental)

As a below named inventor, I hereby declare that:

**TYPE OF DECLARATION**

This declaration is of the following type: (check one applicable item below)

- original  
design  
supplemental  
**X** National Stage of PCT  
divisional (see added page)  
continuation (see added page)  
continuation-in-part (see added page)

**INVENTORSHIP IDENTIFICATION**

My residence, post office address and citizenship are as stated below next to my name. I believe that the original, first and sole inventor (*if only one name is listed below*) an original, first and joint inventors (*if plural names are listed below*) of the subject matter that is claimed, and for which a patent is sought on the invention entitled:

**TITLE OF INVENTION**

**POWER DISTRIBUTION TRANSMISSION**

**SPECIFICATION IDENTIFICATION**

The specification of which: (complete (a), (b) or (c))

- (a) is attached hereto.  
(b) was filed on \_\_\_\_\_ as " Serial No. \_\_\_\_\_  
0 / \_\_\_\_\_ or " Express Mail No. \_\_\_\_\_ (as Serial  
No. not yet known) \_\_\_\_\_ and was amended on \_\_\_\_\_ (if  
applicable).  
(c) **X** was described and claimed in PCT International  
Application No. PCT/EP00/06744 filed on  
14 July 2000 (14.07.200) and as amended under PCT  
Article 19 on \_\_\_\_\_ (if any).

**POWER OF ATTORNEY**

As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. (list name(s) and registration number(s))

**3** Anthony G. M. Davis      Registration No. 27,868  
Michael J. Bujold      Registration No. 32,018  
Scott A. Daniels      Registration No. 42,462

Attached as part of this Declaration and Power of Attorney is the authorization of the above-named attorney(s) to accept and follow instructions from my representative(s).

Send Correspondence to  
Davis & Bujold, P. L. L. C.  
Fourth Floor  
500 N. Commercial Street  
Manchester, NH 03101

Direct Telephone Calls to:  
(603) 624-9220

Direct Telefaxes to:  
(603) 624-9229

## ACKNOWLEDGEMENT OF REVIEW OF PAPERS AND DUTY OF CANDOR

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose to the United States Patent Office all information which is known to be material to patentability of this application as defined in § 1.56 of Title 37 of the Code of Federal Regulations.

## PRIORITY CLAIM

I hereby claim foreign priority benefits under Title 35, United States Code, § 119 of any foreign application(s) for patent or inventor's certificate or of any PCT international application(s) designating at least one country other than the United States of America listed below and have also identified below any foreign application(s) for patent or inventor's certificate or any PCT international application(s) designating at least one country other than the United States of America filed by me on the same subject matter having a filing date before that of the application(s) of which priority is claimed.

### EARLIEST FOREIGN APPLICATION(S), IF ANY FILED WITHIN 12 MONTHS (6 MONTHS FOR DESIGN) PRIOR TO THIS U.S. APPLICATION

COUNTRY	APPLICATION NO.	DATE OF FILING (day,month,year)	PRIORITY CLAIMED UNDER 37 USC 119
Fed. Rep. of Germany	199 33 822.1	(20.07.99) 20 July 1999	<input checked="" type="checkbox"/> YES NO
			YES NO
			YES NO
			YES NO
			YES NO

### ALL FOREIGN APPLICATION(S), IF ANY FILED MORE THAN 12 MONTHS (6 MONTHS FOR DESIGN) PRIOR TO THIS U.S. APPLICATION

## DECLARATION

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Signature(s)

Full name of sole or first inventor Martin HILDEBRAND

Inventor's signature Martin Hildebrand Date 2001-10-01

Country of Citizenship Fed. Rep. of Germany

Residence Heiligasse 26 , D-88048 Friedrichshafen , Germany DEX

Post Office Address c/o ZF Friedrichshafen AG, D-88038 Friedrichshafen, Germany

Full name of **second** joint inventor (if any) Rudolf ZENTSCH

20 Inventor's signature *Rudolf Zentsch* Date 2001-10-11

Country of Citizenship **Fed. Rep. of Germany**

Residence **Appenzeller Str. 10 , D-88045 Friedrichshafen , Germany** DEX

Post Office Address c/o ZF Friedrichshafen AG, D-88038 Friedrichshafen, Germany

Full name of **third** joint inventor (if any) \_\_\_\_\_

Inventor's signature \_\_\_\_\_ Date \_\_\_\_\_

Country of Citizenship \_\_\_\_\_

Residence \_\_\_\_\_

Post Office Address \_\_\_\_\_

Full name of **fourth** joint inventor (if any) \_\_\_\_\_

Inventor's signature \_\_\_\_\_ Date \_\_\_\_\_

Country of Citizenship \_\_\_\_\_

Residence \_\_\_\_\_

Post Office Address \_\_\_\_\_

Full name of **fifth** joint inventor (if any) \_\_\_\_\_

Inventor's signature \_\_\_\_\_ Date \_\_\_\_\_

Country of Citizenship \_\_\_\_\_

Residence \_\_\_\_\_

Post Office Address \_\_\_\_\_

Full name of **sixth** joint inventor (if any) \_\_\_\_\_

Inventor's signature \_\_\_\_\_ Date \_\_\_\_\_

Country of Citizenship \_\_\_\_\_

Residence \_\_\_\_\_

Post Office Address \_\_\_\_\_

Full name of **seventh** joint inventor (if any) \_\_\_\_\_

Inventor's signature \_\_\_\_\_ Date \_\_\_\_\_

Country of Citizenship \_\_\_\_\_

Residence \_\_\_\_\_

Post Office Address \_\_\_\_\_